

## LED CANOPY LOW WATTAGE (LW) FEATURES

- Environmentally friendly; mercury free
- Replaces traditional high pressure sodium lamps
- Ideal design for heat dissipation
- Impact resistant lens
- UL & DLC listed
- Suitable for wet locations
- Five-year warranty

## APPLICATION


- Gas station, Warehouse, Retail, Municipal lighting, Ports




INV: INVENTORY  
MTO-qty: MADE TO ORDER

### Technical Specification


Part No.	Watt. (W)	Lumens (lm)	Voltage	HID/CFL Equiv.	Weight (lb)	DLC	DLC V4.0	Live Status
RECL-045W40K01	45	4950	AC100-277V 50/60Hz	150W-175W/ 52W-85W	7.72	LISTED	✓	MTO- 25
RECL-045W50K01	45	4950	AC100-277V 50/60Hz	150W-175W/ 52W-85W	7.72	LISTED	✓	INV
RECL-045W57K01	45	4950	AC100-277V 50/60Hz	150W-175W/ 52W-85W	7.72	LISTED	✓	MTO- 25
RECL-075W40K01	75	8250	AC100-277V 50/60Hz	250W/ 150W	7.72	LISTED	✓	MTO- 25
RECL-075W50K01	75	8250	AC100-277V 50/60Hz	250W/ 150W	7.72	LISTED	✓	MTO- 25
RECL-075W57K01	75	8250	AC100-277V 50/60Hz	250W/ 150W	7.72	LISTED	✓	MTO- 25
CRI(Ra)	70							
PF	0.9							
Beam Angle	110°							
Dimmable	NO							
Working Temperature (°C)	-20~+45							
Lifetime (H)	50000							
Suitable Location	Wet							
Mounting options	Semi recessed or flush							
Voltage	100-277V							

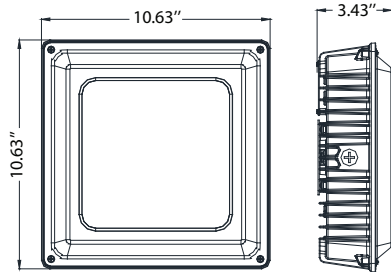

45W / 75W

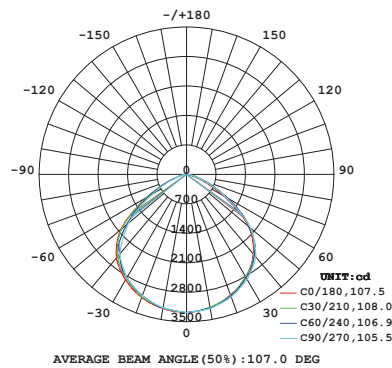

75W

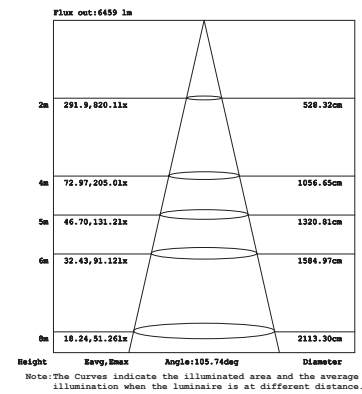

## LED CANOPY HIGH WATTAGE (HW)

### FEATURES

- Environmentally friendly; mercury free
- Replaces traditional high pressure sodium lamps
- Ideal design for heat dissipation
- Impact resistant lense
- UL & DLC listed
- Suitable for wet locations
- Five-year warranty

### APPLICATION

- Gas station, Warehouse, Retail, Municipal lighting, Ports






INV: INVENTORY  
MTO-qty: MADE TO ORDER

### Technical Specification

Part No.	Watt. (W)	Lumens (lm)	Voltage	HID/CFL Equiv.	Weight (lb)	DLC	DLC V4.0	Live Status
RECL-100W40K01	100	11000	AC100-277V 50/60Hz	400W/ 280W	12.79	LISTED	✓	MTO-25
RECL-100W50K01	100	11000	AC100-277V 50/60Hz	400W/ 280W	12.79	LISTED	✓	INV
RECL-100W57K01	100	11000	AC100-277V 50/60Hz	400W/ 280W	12.79	LISTED	✓	MTO-25
RECL-130W40K01	130	14300	AC100-277V 50/60Hz	500W/ 300W	12.79	LISTED	✓	MTO-25
RECL-130W50K01	130	14300	AC100-277V 50/60Hz	500W/ 300W	12.79	LISTED	✓	MTO-25
RECL-130W57K01	130	14300	AC100-277V 50/60Hz	500W/ 300W	12.79	LISTED	✓	MTO-25
RECL-130W40K02	130	14300	AC180-480V 50/60Hz	500W/ 300W	12.79	LISTED	✓	MTO-25
RECL-130W50K02	130	14300	AC180-480V 50/60Hz	500W/ 300W	12.79	LISTED	✓	MTO-25
RECL-130W57K02	130	14300	AC180-480V 50/60Hz	500W/ 300W	12.79	LISTED	✓	MTO-25
RECL-150W40K01	150	16500	AC100-277V 50/60Hz	500-750W/ 350-500W	12.79	LISTED	✓	MTO-25
RECL-150W50K01	150	16500	AC100-277V 50/60Hz	500-750W/ 350-500W	12.79	LISTED	✓	MTO-25
RECL-150W57K01	150	16500	AC100-277V 50/60Hz	500-750W/ 350-500W	12.79	LISTED	✓	MTO-25

CRI(Ra)	70
PF	0.9
Beam Angle	110°
Dimmable	NO
Working Temperature (°C)	-20~+45
Lifetime (H)	50000
Suitable Location	Wet
Mounting options	Semi recessed or flush
Voltage	100-277V

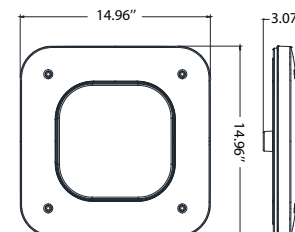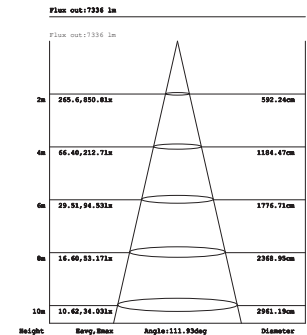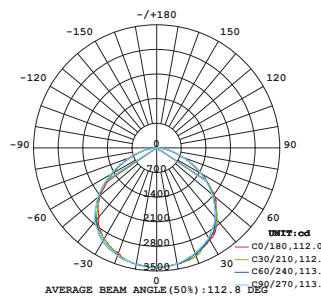

100W / 130W / 150W